

# SST™ Central Tube Steel Armour Outdoor Cable

8F E9 SMF-28e+® ITU G652.D CT 3.0

CORNING

Corning central tube cables with corrugated steel armouring are designed for outdoor use for campus, city and intercity backbones in duct and direct burial installations.

The central tube cable construction, by isolating the fibres from installations and environmental rigors, provides stable and highly reliable transmission parameters. The fibres are colour coded for quick and easy identification.

The cable construction, based on a central buffer tube, is very compact, light, flexible and ideal for connections requiring a moderate fibre count.

These cables are designed for installation in conduits, ducts and for direct burial.

## Features and Benefits

### Waterblocking technology

Outside Plant (OSP) applications

### UV and microbe resistant

Can be directly buried or installed in ducts

### Corrugated steel armouring

Rodent, mechanical protection and direct buried applications

### Small diameter and bend radius

Easy installation in space-constrained areas

### Fibres colour coding to Telcordia-Bellcore


Easy identification of the individual fibres

## Standards

**Waterblocking** IEC 60794-1-2 F5



Part Number: 008EEC-13122A20

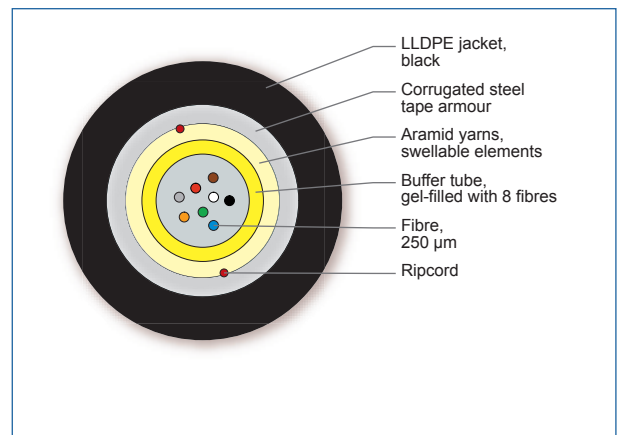

Cross Section of Order Number: 008EEC-13122A20

## Specifications

General Specifications	
Environment	Outdoor
Application	Direct Buried, Duct
Cable type	Central Tube
Product type	Corrugated steel armour

# SST™ Central Tube Steel Armour Outdoor Cable

8F E9 SMF-28e+® ITU G652.D CT 3.0

CORNING

## General Specifications

Fibre Category	SM (OS2)
Coding according to EN 60794-1-1 (DIN VDE 0888-100-1)	A-DQ(ZN)(SR)2Y
Previous part number	FWCT01-S0008-U003
Previous coding following DIN VDE 0888-3	A-DQ(ZN)(SR)2Y

## Temperature Range

Installation and assembly	-5 °C to 50 °C
Operation	-20 °C to 60 °C
Storage	-25 °C to 70 °C

## Cable Design

Fibre Count	8
Fibre colouring	Blue, Orange, Green, Brown, Grey, White, Red, Black
Buffer tube colour	Green
Buffer tube diameter	3 mm
Number of ripcords	2
Tensile Strength Elements and/or Armouring - Layer 1	Corrugated steel tape armour with dielectric strength elements (aramid yarns) and swellable elements
Outer jacket material	Linear Low Density Polyethylene (LLDPE)
Outer jacket colour	Black
Outer jacket nominal thickness	1.5 mm
Cable marking	Metre - Handset - Sine - CORNING - Year - SST (TM) A-DQ(ZN)(SR)2Y 8F E9 CT 3.0

## Mechanical Characteristics Cable

Nominal Outer Diameter	7.5 mm
Weight	60 kg/km
Min. Bend Radius Installation	150 mm
Min. Bend Radius Operation	110 mm
Max. tensile strength for installation	1000 N
Crush resistance (reversible)	2000 N/10 cm

# SST™ Central Tube Steel Armour Outdoor Cable

8F E9 SMF-28e+® ITU G652.D CT 3.0

CORNING

## Chemical Characteristics

RoHS	Free of hazardous substances according to RoHS 2011/65/EU
------	-----------------------------------------------------------

## Fibre Specifications

### Optical Characteristics (cabled)

Fibre name	E9/125 SMF28e+
Fibre core diameter	8.2 µm
Fibre Category	OS2
Fibre code	E
Wavelengths	1310 nm / 1383 nm / 1550 nm
Maximum attenuation	0.36 dB/km / 0.36 dB/km / 0.22 dB/km
Serial 1 gigabit ethernet	5000 m / - / -
Serial 10 gigabit ethernet	10000 m / - / 40000 m
Cable cutoff wavelength	1260 nm
Standards in compliance	TIA/EIA 492-CAAB IEC 60793-2-50 Type B1.3, ITU-T G.652 D, ISO/IEC 11801 Ed.2.2

- Notes:
- 1) Meets 0.75 ns optical skew when used in all Corning Plug and Play™/EDGE™ systems solutions.
  - 2) Improved attenuation and bandwidth options available
  - 3) Bend-insensitive single-mode fibres available on request.
  - 4) Contact a Corning Customer Care Representative for additional information

## Ordering Information

Part Number	008EEC-13122A20
Product Description	SST™ Central Tube Steel Armour Outdoor Cable 8F E9 SMF-28e+® ITU G652.D CT 3.0
EAN Code	4042673580652

## Shipping Information

Maximum delivery length	4,000 m
-------------------------	---------

# SST™ Central Tube Steel Armour Outdoor Cable

8F E9 SMF-28e+® ITU G652.D CT 3.0

The logo consists of a solid blue square with the word "CORNING" written in white, uppercase, sans-serif font in the center.

## Notes



Corning Optical Communications GmbH & Co. KG · Leipziger Strasse 121 · 10117 Berlin, GERMANY  
00 800 2676 4641 · FAX: +49 30 5303 2335 · [www.corning.com/opcomm/emea](http://www.corning.com/opcomm/emea)

A complete listing of the trademarks of Corning Optical Communications is available at [www.corning.com/opcomm/emea/trademarks](http://www.corning.com/opcomm/emea/trademarks). Corning Optical Communications is ISO 9001 and ISO 14001 certified.  
© 2017 Corning Optical Communications. All rights reserved.